


## TP-Link: Basic switch configuration

emulator: <https://emulator.tp-link.com/TL-SL5428E/Index.htm>

1. Open a browser type the switch configuration address 192.168.1.1

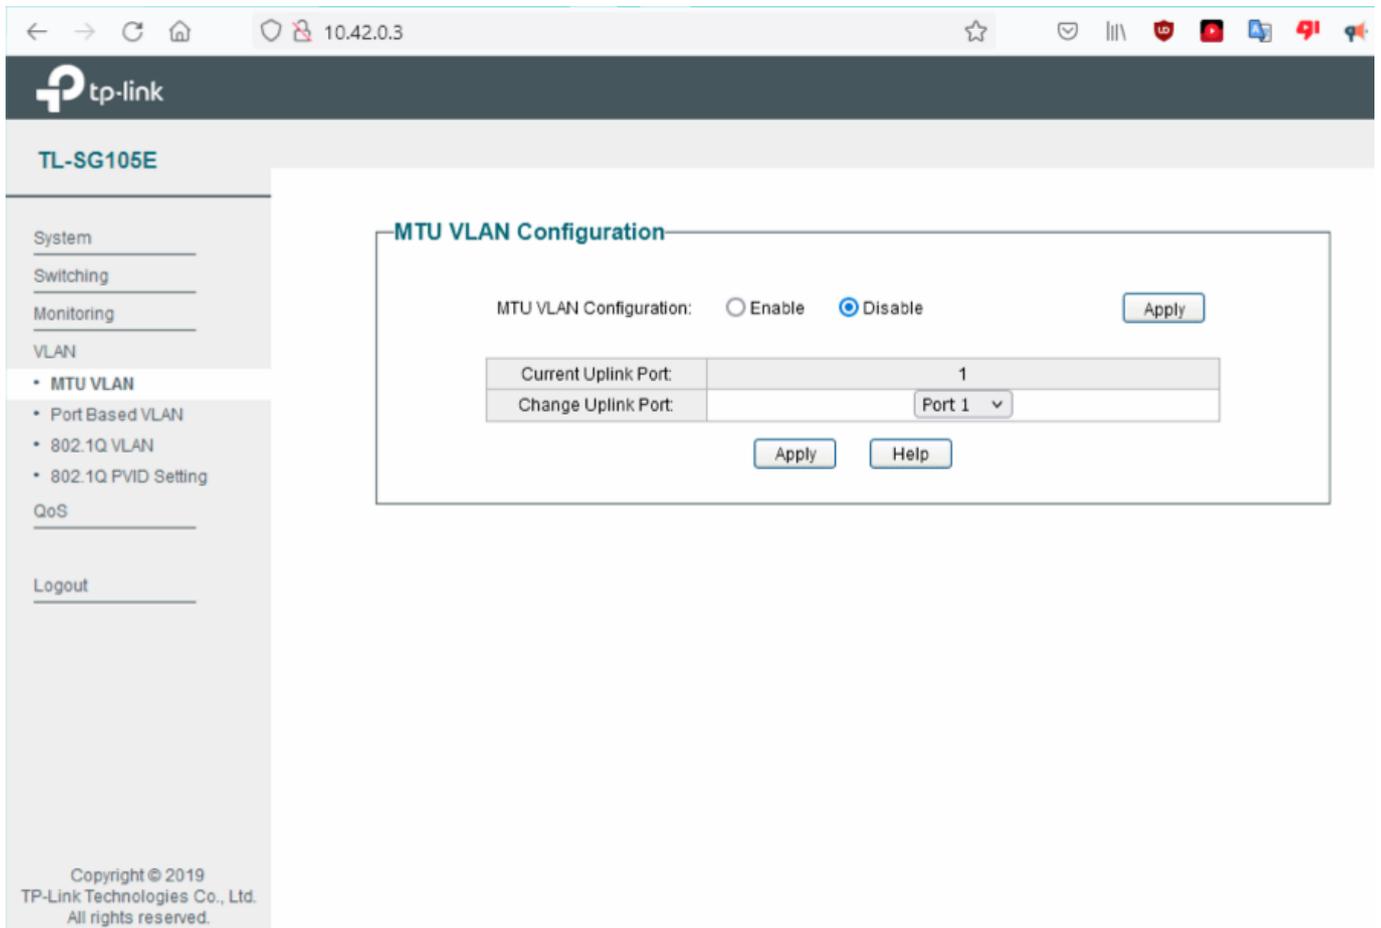

1. Switching tab

**802.1Q VLAN Configuration**

802.1Q VLAN Configuration:  Enable  Disable Apply

VLAN ID	(1-4094)			VLAN Name	
Port	Untagged	Tagged	Not Member		
Select All	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
Port 1	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>		
Port 2	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>		
Port 3	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>		
Port 4	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>		
Port 5	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>		

Add/Modify    Help

VLAN ID	VLAN Name	Member Ports	Tagged Ports	Untagged Ports	Delete
Select All    Delete					

Copyright © 2019 TP-Link Technologies Co., Ltd. All rights reserved.

- Untagged - Access link to one VLAN
- Tagged - trunk link to several VLANs.
- Not member - does not depend on the VLAN the user is currently in.
- VLAN ID - the identification number of a specific VLAN.
- VLAN name - this is the name that is only visible on this device.



- Remember to press add/modify

1. Remember to add parent vlans in the PVID tab.

### 802.1Q VLAN PVID Setting

Select	Port	PVID
<input type="checkbox"/>		<input type="text"/>
<input type="checkbox"/>	Port 1	1
<input type="checkbox"/>	Port 2	1
<input type="checkbox"/>	Port 3	1
<input type="checkbox"/>	Port 4	1
<input type="checkbox"/>	Port 5	1

Apply

Help

**Note:**

- 1. By default, the PVID of all ports is 1.
- 2. 802.1Q VLAN PVID will be restored to 1 when 802.1Q VLAN is disabled.