

Linux: podstawy

Przełożenie prezentacji którą zrobiłem kiedyś na szkolenie podstaw z systemu Linux

Linux

Historia, Konstrukcja Systemu, Powłoka
Systemowa, Środowisko graficzne

•

Linux w teorii

historia i pojęcia

•

Twórcy UNIXa



-

Pierwszy komputer na którym uruchomiono UNIXA



-

Pierwsze środowisko graficzne dla UNIXA



Jak powstał LINUX ?



Jak powstało GNU ?



</slide>

Jak powstał GNU/Linux ?

```
QEMU
Debian GNU/Linux 6.0 debian1 tty1
debian1 login: root
Password:
Last login: Fri Jan 10 09:53:12 CST 2014 on tty1
Linux debian1 2.6.32-5-686 #1 SMP Fri May 10 08:33:48 UTC 2013 i686

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
root@debian1:~# _
```

Konstrukcja systemu

Organizacja katalogów systemu

```
bin
boot
cdrom
dev
etc
home
initrd.img -> boot/initrd.img-4.15.0-66-generic
initrd.img.old -> boot/initrd.img-4.15.0-65-generic
lib
lib32
lib64
libx32
lost+found
media
mnt
opt
proc
root
run
sbin
snap
srv
sys
tmp
usr
var
vmlinuz -> boot/vmlinuz-4.15.0-66-generic
vmlinuz.old -> boot/vmlinuz-4.15.0-65-generic
```

</slide>

Konstrukcja systemu

Powłoka systemowa

Linux Command Cheat Sheet					
Basic commands		File management		File Utilities	
	Pipe (redirect) output	find	search for a file	tr -d	translate or delete character
sudo [command]	run <command> in superuser mode	ls -a <C> -lh	list content of directory	uniq <-u	report or omit repeated lines
nohup [command]	run <command> immune to hangup signal	rm -r <f>	remove files and directory	split <f>	split file into pieces
man [command]	display help pages of <command>	locate -i	find file, using updated(8) database	wc -w	print newline, word, and byte counts for each file
[command] &	run <command> and send task to background	cp -a -R <f>	copy files or directory	head -n	output the first part of files
>> [fileA]	append to fileA, preserving existing contents	du -s	disk usage	cut -s	remove section from file
> [fileA]	output to fileA, overwriting contents	file -b <f>	identify the file type	diff -q	file compare, line by line
echo -n	display a line of text	mv -f <f>	move files or directory	join -i	join lines of two files on a common field
xargs	build command line from previous output	grep, egrep, fgrep -i -v	print lines matching pattern	more, less	view file content, one page at a time
1>2&	Redirect stdout to stderr	File compression		sort -n	sort lines in text file
fg %N	go to task N	tar xvfz	create or extract .tar or .gz files	comm -i3	compare two sorted files, line by line
jobs	list task	gzip, gunzip, xcat	create, extract or view .gz files	cat -s	concatenate files to the standard output
Ctrl-z	suspend current task	uuecode, uuencode	create or extract .Z files	tail -f	output last part of the file
		zip, unzip -v	create or extract .ZIP files		

</slide>

Konstrukcja systemu

Środowiska graficzne



root

sudo

sudo su

su

passwd root



Dyski i partycje w systemie

.hda1 – pierwszy dysk, 1 partycja


.hdb2 – pierwszy dysk, 2 partycja

.hdd4 – czwarty dysk, 4 partycja

.sudo fdisk -l

.df -h

•

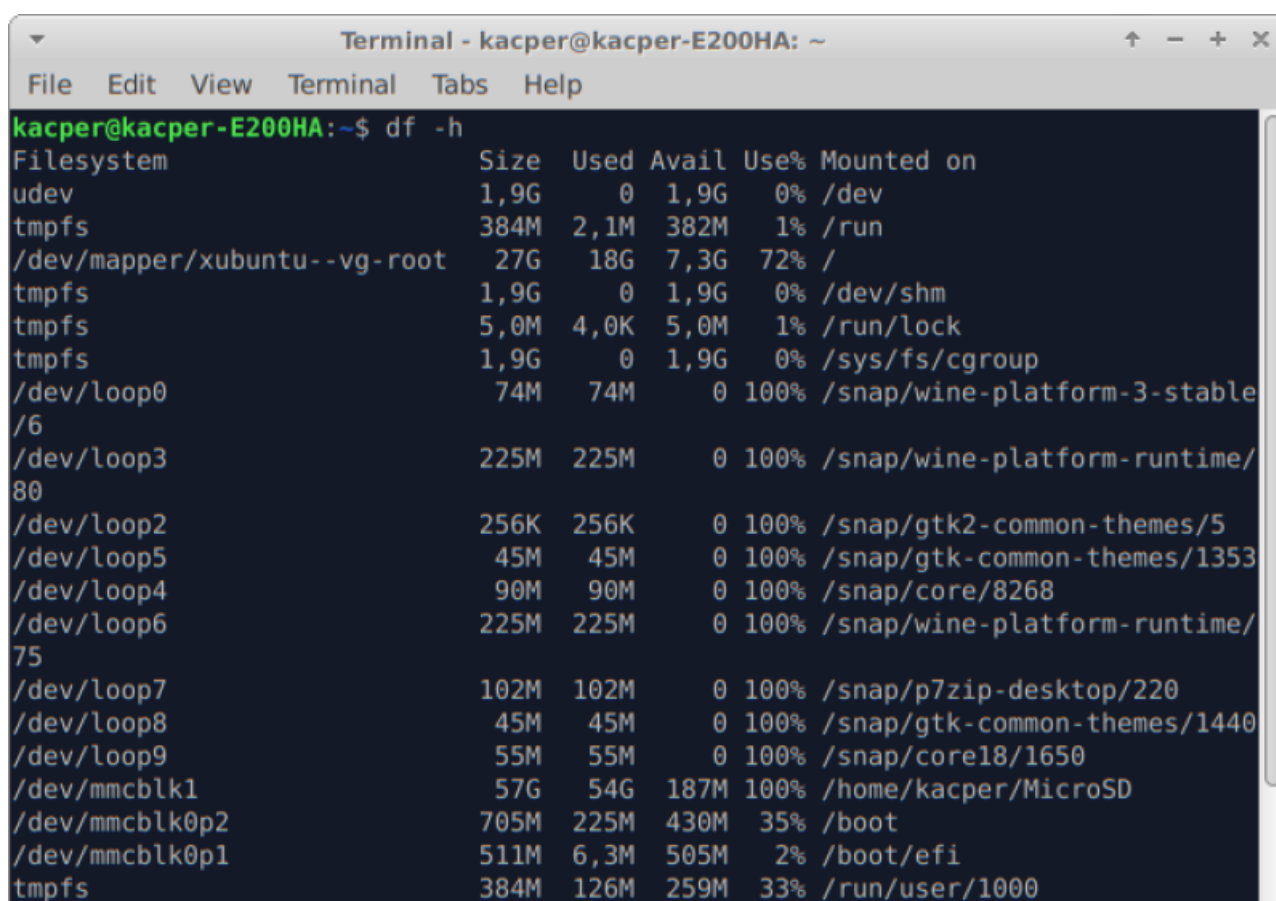

```
Terminal - kacper@kacper-E200HA: ~
File Edit View Terminal Tabs Help
kacper@kacper-E200HA:~$ df -h
Filesystem      Size  Used Avail Use% Mounted on
udev            1,9G     0   1,9G   0% /dev
tmpfs           384M    2,1M  382M   1% /run
/dev/mapper/xubuntu--vg-root 27G    18G   7,3G  72% /
tmpfs           1,9G     0   1,9G   0% /dev/shm
tmpfs           5,0M    4,0K   5,0M   1% /run/lock
tmpfs           1,9G     0   1,9G   0% /sys/fs/cgroup
/dev/loop0       74M    74M     0 100% /snap/wine-platform-3-stable
/6
/dev/loop3      225M   225M     0 100% /snap/wine-platform-runtime/
80
/dev/loop2       256K   256K     0 100% /snap/gtk2-common-themes/5
/dev/loop5        45M    45M     0 100% /snap/gtk-common-themes/1353
/dev/loop4        90M    90M     0 100% /snap/core/8268
/dev/loop6      225M   225M     0 100% /snap/wine-platform-runtime/
75
/dev/loop7       102M   102M     0 100% /snap/p7zip-desktop/220
/dev/loop8        45M    45M     0 100% /snap/gtk-common-themes/1440
/dev/loop9        55M    55M     0 100% /snap/core18/1650
/dev/mmcblk1     57G    54G   187M  100% /home/kacper/MicroSD
/dev/mmcblk0p2   705M   225M   430M   35% /boot
/dev/mmcblk0p1   511M    6,3M   505M    2% /boot/efi
tmpfs           384M   126M   259M   33% /run/user/1000
```

•

```
Terminal - kacper@kacper-E200HA: ~
File Edit View Terminal Tabs Help
kacper@kacper-E200HA:~$ sudo fdisk -l
[sudo] password for kacper:
Disk /dev/loop0: 74 MiB, 77565952 bytes, 151496 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes

Disk /dev/loop2: 132 KiB, 135168 bytes, 264 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes

Disk /dev/loop3: 224,6 MiB, 235503616 bytes, 459968 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes

Disk /dev/loop4: 89,1 MiB, 93417472 bytes, 182456 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
```

Polecenie man

.man polecenie

```
Terminal - kacper@kacper-E200HA: ~
File Edit View Terminal Tabs Help
DD(1) User Commands DD(1)

NAME
dd - convert and copy a file

SYNOPSIS
dd [OPERAND]...
dd OPTION

DESCRIPTION
Copy a file, converting and formatting according to the operands.

bs=BYTES
    read and write up to BYTES bytes at a time (default: 512); over-
    rides ibs and obs

cbs=BYTES
    convert BYTES bytes at a time

conv=CONVS
    convert the file as per the comma separated symbol list

count=N

Manual page dd(1) line 1 (press h for help or q to quit)
```

Polecenie ls

.ls -a

.ls -l

.ls -a -l

.ls -l -h

```

Terminal - kacper@kacper-E200HA: ~/MicroSD/bash_scripts/test
File Edit View Terminal Tabs Help
kacper@kacper-E200HA:~/MicroSD/bash_scripts/test$ ls -l -h
total 248K
-rw-rw-r-- 1 kacper kacper 10K lis 25 09:31 10k.txt
-rw-rw-r-- 1 kacper kacper 1,0K lis 25 09:30 1k.txt
-rw-rw-r-- 1 kacper kacper 2,0K lis 25 09:30 2k.txt
-rw-rw-r-- 1 kacper kacper 3,0K lis 25 09:30 3k.txt
drwxrwxr-x 2 kacper kacper 4,0K lis 25 09:33 4kksjdy
-rw-rw-r-- 1 kacper kacper 4,0K lis 25 09:30 4k.txt
-rw-rw-r-- 1 kacper kacper 5,0K lis 25 09:30 5k.txt
-rw-rw-r-- 1 kacper kacper 6,0K lis 25 09:31 6k.txt
-rw-rw-r-- 1 kacper kacper 7,0K lis 25 09:31 7k.txt
-rw-rw-r-- 1 kacper kacper 8,0K lis 25 09:31 8k.txt
-rw-rw-r-- 1 kacper kacper 9,0K lis 25 09:31 9k.txt
-rw-rw-r-- 1 kacper kacper 0 lis 18 19:42 bydgoszcz.txt
drwxrwxr-x 4 kacper kacper 4,0K gru 23 19:12 catalog1
drwxrwxr-x 3 kacper kacper 4,0K lis 18 19:40 catalog2
drwxrwxr-x 2 kacper kacper 4,0K gru 23 19:12 catalog3
-rw-rw-r-- 1 kacper kacper 0 paź 10 2016 dates1
drwxrwxr-x 2 kacper kacper 4,0K lis 25 09:34 Ddasdy
-rw-rw-r-- 1 kacper kacper 0 lis 18 19:41 Efghi
-rw-rw-r-- 1 kacper kacper 0 lis 18 19:41 file1
-rw-rw-r-- 1 kacper kacper 100 gru 4 21:07 file-10.txt
-rw-rw-r-- 1 kacper kacper 100 gru 4 21:07 file-1.txt
-rw-rw-r-- 1 kacper kacper 0 lis 18 19:41 file2
  
```

Wynik polecenia ls -l

-rw-rw-r-- 1 kacper kacper 10240 lis 25 09:31 10k.txt

.Uprawnienia

.Liczba dowiązań do tego elementu

.Właściciel pliku i grupa do której należy

.Rozmiar pliku w bajtach

.Data ostatniej modyfikacji pliku

.Nazwa pliku wraz z rozszerzeniem

-rw-rw-r--

.Typ pliku

- zwykły plik
- d katalog
- l dowiązanie symboliczn

.Uprawnienia dla właściciela

- R “read” przeszukiwanie zawartości lub odczytanie pliku
- W “write” zmiana zawartości lub edycja pliku
- X “execute” wejście do katalogu lub wykonanie pliku

.Uprawnienia dla grupy

.Uprawnienia dla “reszty świata”, czyli dla wszystkich innych użytkowników

•

</slide>

Operacje na katalogach i plikach

.mkdir – tworzy katalog

.cd – przechodzi do danej lokalizacji

.rm lub rmdir – usuwa plik lub katalog (rm -r usuwa zawartość katalogu ale tylko na rootcie)

.Touch – tworzy nowy plik o zadanej nazwie

.program plik.txt – otwiera “plik.txt” za pomocą programu “program”

.cat, more, less – wyświetla zawartość pliku

.echo “123” >> plik.txt – przelewa “123” do pliku “plik.txt”

•

From:

<https://wiki.ostrowski.net.pl/> - Kacper's Wiki

Permanent link:

https://wiki.ostrowski.net.pl/doku.php?id=notatki:podstawy_linux_a&rev=1747222636

Last update: **2025/05/14 13:37**